
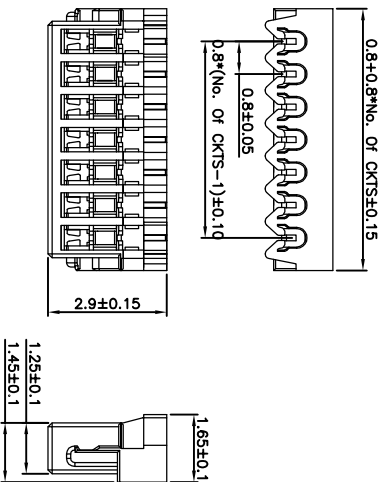


**0.80mm(0.032") Pitch
Wire To Board Connector**

0208000

IDC style

Low-profile type



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0208000-022120	12	0208000-122120
03	0208000-032120	14	0208000-142120
04	0208000-042120	15	0208000-152120
05	0208000-052120	16	0208000-162120
06	0208000-062120	17	0208000-172120
08	0208000-082120	20	0208000-202120
10	0208000-102120	22	0208000-222120

Specifications
Rating
 Current Rating:0.5 Amp Max.
 Voltage Rating:30V AC/DC Max.
 Operating Temperature Range:-25~+85°C




Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:250V AC/Minute

Material And Finish
 Insulator:Nylon 6T UL94V-0 Natural
 Contact:Copper Alloy
 Plated:Tin Plated

**0.80mm(0.032") Pitch
Wire To Board Connector**

0208013

Vertical, SMT

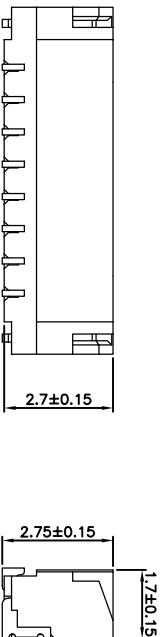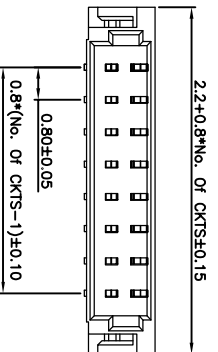

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0208013-022121	12	0208013-122121
03	0208013-032121	14	0208013-142121
04	0208013-042121	15	0208013-152121
05	0208013-052121	16	0208013-162121
06	0208013-062121	17	0208013-172121
08	0208013-082121	20	0208013-202121
10	0208013-102121	22	0208013-222121

Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:250V AC/Minute




Material And Finish
 Insulator:Nylon 6T UL94V-0 Natural
 Contact:Copper Alloy
 Plated:Tin Plated

Specifications
Rating
 Current Rating:0.5 Amp Max.
 Voltage Rating:30V AC/DC Max.
 Operating Temperature Range:-25~+85°C

**0.80mm(0.032") Pitch
Wire To Board Connector**


0208014

Right Angle, SMT



- Specifications**
- Rating**
 Current Rating:0.5 Amp Max.
 Voltage Rating:30V AC/DC Max.
 Operating Temperature Range:--25~+85°C
- Electrical**
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:250V AC/Minute
- Material And Finish**
 Insulator:Nylon 6T UL94V-0 Natural
 Contact:Copper Alloy
 Plated:Tin Plated





No. of CKTS	Part No.	No. of CKTS	Part No.
02	0208014-022121	12	0208014-122121
03	0208014-032121	14	0208014-142121
04	0208014-042121	15	0208014-152121
05	0208014-052121	16	0208014-162121
06	0208014-062121	17	0208014-172121
08	0208014-082121	20	0208014-202121
10	0208014-102121	22	0208014-222121



**1.00mm(0.039") Pitch
Wire To Board Connector**

0210023

Vertical, SMT

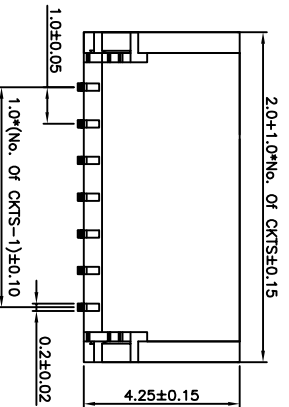





- Specifications**
- Rating**
 Current Rating:1.0 Amp Max.
 Voltage Rating:50V AC/DC Max.
 Operating Temperature Range:--25~+85°C
- Electrical**
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:250V AC/Minute
- Material And Finish**
 Insulator:Nylon 6T UL94V-0 Natural
 Contact:Copper Alloy
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0210023-022121	12	0210023-122121
03	0210023-032121	13	0210023-132121
04	0210023-042121	14	0210023-142121
05	0210023-052121	15	0210023-152121
06	0210023-062121	16	0210023-162121
07	0210023-072121	17	0210023-172121
08	0210023-082121	18	0210023-182121
09	0210023-092121	19	0210023-192121
10	0210023-102121	20	0210023-202121
11	0210023-112121		

**1.00mm(0.039") Pitch
Wire To Board Connector**

0210024

Right Angle, SMT

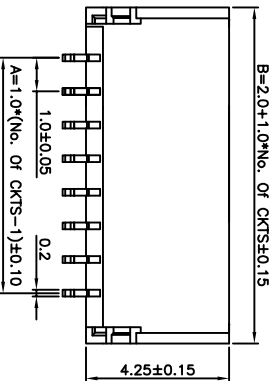





No. of CKTS	Part No.	No. of CKTS	Part No.
02	0210024-02121	12	0210024-122121
03	0210024-032121	13	0210024-132121
04	0210024-042121	14	0210024-142121
05	0210024-052121	15	0210024-152121
06	0210024-062121	16	0210024-162121
07	0210024-072121	17	0210024-172121
08	0210024-082121	18	0210024-182121
09	0210024-092121	19	0210024-192121
10	0210024-102121	20	0210024-202121
11	0210024-112121		

**1.00mm(0.039") Pitch
Wire To Board Connector**

0210033

Vertical, SMT

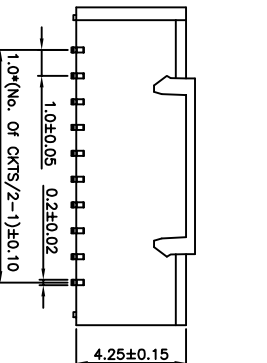

No. of CKTS	Part No.
12	0210033-122121
16	0210033-162121
20	0210033-202121
32	0210033-322121
40	0210033-402121
50	0210033-502121

Specifications
Rating
 Current Rating:1.0 Amp Max.
 Voltage Rating:50V AC/DC Max.
 Operating Temperature Range:--25°~+85°C

Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:250V AC/Minute

Material And Finish
 Insulator:Nylon 6T UL94V-0 Natural
 Contact:Copper Alloy
 Plated:Tin Plated

Specifications
Rating
 Current Rating:1.0 Amp Max.
 Voltage Rating:50V AC/DC Max.
 Operating Temperature Range:--25°~+85°C





Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:250V AC/Minute

Material And Finish
 Insulator:Nylon 6T UL94V-0 Natural
 Contact:Copper Alloy
 Plated:Tin Plated

1.00mm(0.039") Pitch
Wire To Board Connector

02110034

Right Angle, SMT

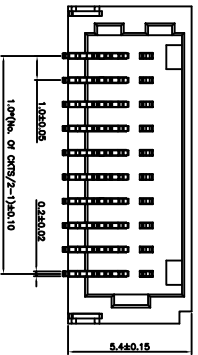

No.of CKTS	Part No.
12	02110034-122121
16	02110034-162121
20	02110034-202121
32	02110034-322121
40	02110034-402121
50	02110034-502121

Specifications
Rating
Current Rating:1.0 Amp Max.
Voltage Rating:50V AC/DC Max.
Operating Temperature Range:-25~+85°C




Electrical
Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:250V AC/Minute

Material And Finish
Insulator:Nylon 6T UL94V-0 Natural
Contact:Copper Alloy
Plated:Tin Plated

1.20mm(0.047") Pitch
Wire To Board Connector

02120044

Vertical, SMT



No.of CKTS	Part No.	No.of CKTS	Part No.
02	0212044-022304	09	0212044-092304
03	0212044-032304	10	0212044-102304
04	0212044-042304	11	0212044-112304
05	0212044-052304	12	0212044-122304
06	0212044-062304	13	0212044-132304
07	0212044-072304	14	0212044-142304
08	0212044-082304	15	0212044-152304

Specifications
Rating
Current Rating:1.0 Amp Max.
Voltage Rating:50V AC/DC Max.
Operating Temperature Range:-25~+85°C





Electrical
Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute

Material And Finish
Insulator:High Temp. Plastic UL94V-0 Black
Contact:Copper Alloy
Plated:Tin Plated

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212053

Vertical, SMT



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212053-022121	12	0212053-122121
03	0212053-032121	13	0212053-132121
04	0212053-042121	14	0212053-142121
05	0212053-052121	15	0212053-152121
06	0212053-062121	16	0212053-162121
07	0212053-072121	17	0212053-172121
08	0212053-082121	18	0212053-182121
09	0212053-092121	19	0212053-192121
10	0212053-102121	20	0212053-202121
11	0212053-112121		

Material And Finish
 Insulator:Insulator:High Temp. Plastic
 Contact:Copper Alloy
 Plated:Tin Plated





Specifications
Rating
 Current Rating:1.0 Amp Max.
 Voltage Rating:125V AC/DC Max.
 Operating Temperature Range:-25°~+85°C

Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212054

Right Angle, SMT

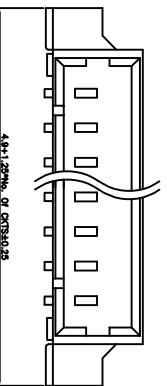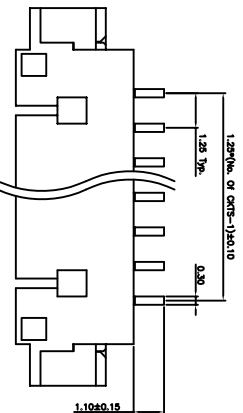

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212054-022121	12	0212054-122121
03	0212054-032121	13	0212054-132121
04	0212054-042121	14	0212054-142121
05	0212054-052121	15	0212054-152121
06	0212054-062121	16	0212054-162121
07	0212054-072121	17	0212054-172121
08	0212054-082121	18	0212054-182121
09	0212054-092121	19	0212054-192121
10	0212054-102121	20	0212054-202121
11	0212054-112121		

Material And Finish
 Insulator:Insulator:High Temp. Plastic
 Contact:Copper Alloy
 Plated:Tin Plated





Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute

Specifications
Rating
 Current Rating:1.0 Amp Max.
 Voltage Rating:125V AC/DC Max.
 Operating Temperature Range:-25°~+85°C

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212061

Vertical, Through Hole

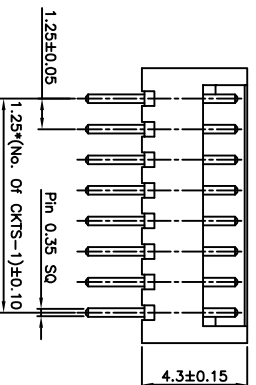

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212061-022221	09	0212061-092221
03	0212061-032221	10	0212061-102221
04	0212061-042221	11	0212061-112221
05	0212061-052221	12	0212061-122221
06	0212061-062221	13	0212061-132221
07	0212061-072221	14	0212061-142221
08	0212061-082221	15	0212061-152221

Specifications

Rating

Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute





Material And Finish

Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212062

Right Angle, Through Hole

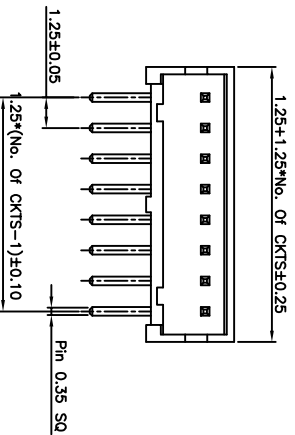

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212062-022221	09	0212062-092221
03	0212062-032221	10	0212062-102221
04	0212062-042221	11	0212062-112221
05	0212062-052221	12	0212062-122221
06	0212062-062221	13	0212062-132221
07	0212062-072221	14	0212062-142221
08	0212062-082221	15	0212062-152221

Specifications

Rating

Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute





Material And Finish

Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212063

Vertical, SMT



Specifications
Rating
 Current Rating:1.0 Amp Max.
 Voltage Rating:125V AC/DC Max.
 Operating Temperature Range:--25°~+85°C

Electrical

Contact resistance:20m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute

Material And Finish





Insulator:Nylon 6T UL94V-0 Color:Natural
 Contact:Copper Alloy
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212063-022121	09	0212063-092121
03	0212063-032121	10	0212063-102121
04	0212063-042121	11	0212063-112121
05	0212063-052121	12	0212063-122121
06	0212063-062121	13	0212063-132121
07	0212063-072121	14	0212063-142121
08	0212063-082121	15	0212063-152121

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212064

Right Angle, SMT



Specifications
Rating
 Current Rating:1.0 Amp Max.
 Voltage Rating:125V AC/DC Max.
 Operating Temperature Range:--25°~+85°C

Electrical

Contact resistance:20m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute

Material And Finish





Insulator:Nylon 6T UL94V-0 Color:Natural
 Contact:Copper Alloy
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212064-022121	09	0212064-092121
03	0212064-032121	10	0212064-102121
04	0212064-042121	11	0212064-112121
05	0212064-052121	12	0212064-122121
06	0212064-062121	13	0212064-132121
07	0212064-072121	14	0212064-142121
08	0212064-082121	15	0212064-152121

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212074

Right Angle, SMT

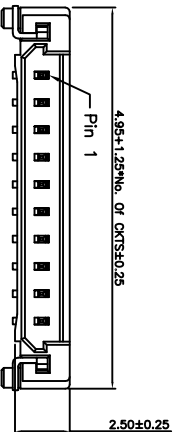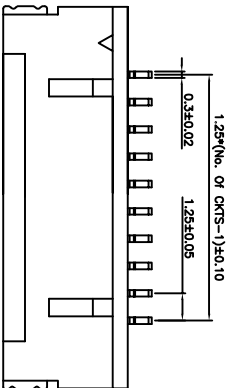

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212074-022121	11	0212074-112121
03	0212074-032121	12	0212074-122121
04	0212074-042121	13	0212074-132121
05	0212074-052121	14	0212074-142121
06	0212074-062121	15	0212074-152121
07	0212074-072121	20	0212074-202121
08	0212074-082121	25	0212074-252121
09	0212074-092121	30	0212074-302121
10	0212074-102121		

Material And Finish
Insulator:Nylon 6T UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated





Specifications
Rating
Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute

**1.25mm(0.049") Pitch
Wire To Board Connector**

0212084

Right Angle, SMT

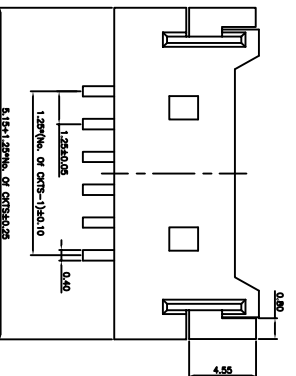

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0212084-022121	17	0212084-172121
03	0212084-032121	18	0212084-182121
04	0212084-042121	19	0212084-192121
05	0212084-052121	20	0212084-202121
06	0212084-062121	21	0212084-212121
07	0212084-072121	22	0212084-222121
08	0212084-082121	23	0212084-232121
09	0212084-092121	24	0212084-242121
10	0212084-102121	25	0212084-252121
11	0212084-112121	26	0212084-262121
12	0212084-122121	27	0212084-272121
13	0212084-132121	28	0212084-282121
14	0212084-142121	29	0212084-292121
15	0212084-152121	30	0212084-302121
16	0212084-162121		

Material And Finish
Insulator:Nylon 6T UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated



Specifications
Rating
Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute

**1.50mm(0.059") Pitch
Wire To Board Connector**

0215091

Vertical, Through Hole

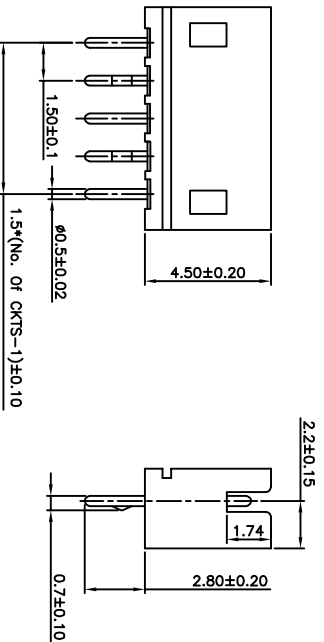

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0215091-022271	09	0215091-092271
03	0215091-032271	10	0215091-102271
04	0215091-042271	11	0215091-112271
05	0215091-052271	12	0215091-122271
06	0215091-062271	13	0215091-132271
07	0215091-072271		
08	0215091-082271		

Specifications

Rating

Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute



Material And Finish

Insulator:Nylon 66 UL94V-0 Color:Gray
Contact:Copper Alloy
Plated:Tin Plated

**1.50mm(0.059") Pitch
Wire To Board Connector**

0215092

Right Angle, Through Hole

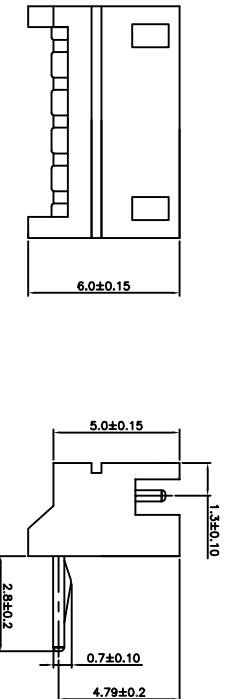

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0215092-022271	09	0215092-092271
03	0215092-032271	10	0215092-102271
04	0215092-042271	11	0215092-112271
05	0215092-052271	12	0215092-122271
06	0215092-062271	13	0215092-132271
07	0215092-072271		
08	0215092-082271		

Specifications

Rating

Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:500M ohm min.
Withstanding Voltage:500V AC/Minute


Material And Finish

Insulator:Nylon 66 UL94V-0 Color:Gray
Contact:Copper Alloy
Plated:Tin Plated



**1.50mm(0.059") Pitch
Wire To Board Connector**

0215103

Vertical, SMT



- Specifications**
- Rating**
- Current Rating:1.0 Amp Max.
- Voltage Rating:125V AC/DC Max.
- Operating Temperature Range:-25~+85°C
- Electrical**
- Contact resistance:20m Ohm Max
- Insulator resistance:100M ohm min.
- Withstanding Voltage:500V AC/Minute
- Material And Finish**
- Insulator:Nylon 6T UL94V-0 Color:Natural
- Contact:Copper Alloy
- Plated:Tin Plated







No. of CKTS	Part No.	No. of CKTS	Part No.
02	0215103-022121	09	0215103-092121
03	0215103-032121	10	0215103-102121
04	0215103-042121	11	0215103-112121
05	0215103-052121	12	0215103-122121
06	0215103-062121	13	0215103-132121
07	0215103-072121		
08	0215103-082121		

**1.50mm(0.059") Pitch
Wire To Board Connector**

0215104

Right Angle, SMT







- Specifications**
- Rating**
- Current Rating:1.0 Amp Max.
- Voltage Rating:125V AC/DC Max.
- Operating Temperature Range:-25~+85°C
- Electrical**
- Contact resistance:20m Ohm Max
- Insulator resistance:100M ohm min.
- Withstanding Voltage:500V AC/Minute
- Material And Finish**
- Insulator:Nylon 6T UL94V-0 Color:Natural
- Contact:Copper Alloy
- Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0215104-022121	09	0215104-092121
03	0215104-032121	10	0215104-102121
04	0215104-042121	11	0215104-112121
05	0215104-052121	12	0215104-122121
06	0215104-062121	13	0215104-132121
07	0215104-072121		
08	0215104-082121		

**1.50mm(0.059") Pitch
Wire To Board Connector**

0215113

Vertical, SMT



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0215113-022121	09	0215113-092121
03	0215113-032121	10	0215113-102121
04	0215113-042121	11	0215113-112121
05	0215113-052121	12	0215113-122121
06	0215113-062121	13	0215113-132121
07	0215113-072121	14	0215113-142121
08	0215113-082121	15	0215113-152121

Specifications

Rating

Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute




Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

**1.50mm(0.059") Pitch
Wire To Board Connector**

0215114

Right Angle, SMT

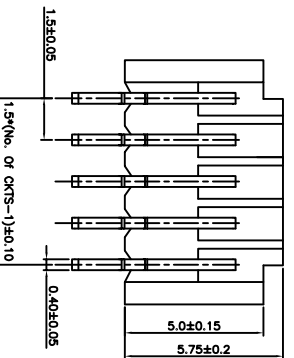

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0215114-022121	09	0215114-092121
03	0215114-032121	10	0215114-102121
04	0215114-042121	11	0215114-112121
05	0215114-052121	12	0215114-122121
06	0215114-062121	13	0215114-132121
07	0215114-072121	14	0215114-142121
08	0215114-082121	15	0215114-152121

Specifications

Rating

Current Rating:1.0 Amp Max.
Voltage Rating:125V AC/DC Max.
Operating Temperature Range:-25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:500V AC/Minute




Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220121

Vertical, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0220121-022221	11	0220121-112221
03	0220121-032221	12	0220121-122221
04	0220121-042221	13	0220121-132221
05	0220121-052221	14	0220121-142221
06	0220121-062221	15	0220121-152221
07	0220121-072221	16	0220121-162221
08	0220121-082221		
09	0220121-092221		
10	0220121-102221		

Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated




Specifications
Rating
Current Rating:2.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220125

Vertical, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0220125-022221	11	0220125-112221
03	0220125-032221	12	0220125-122221
04	0220125-042221	13	0220125-132221
05	0220125-052221	14	0220125-142221
06	0220125-062221	15	0220125-152221
07	0220125-072221	16	0220125-162221
08	0220125-082221		
09	0220125-092221		
10	0220125-102221		

Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated




Specifications
Rating
Current Rating:2.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220136

Right Angle, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0220136-022221	11	0220136-112221
03	0220136-032221	12	0220136-122221
04	0220136-042221	13	0220136-132221
05	0220136-052221	14	0220136-142221
06	0220136-062221	15	0220136-152221
07	0220136-072221	16	0220136-162221
08	0220136-082221		
09	0220136-092221		
10	0220136-102221		

Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated





Specifications
Rating
Current Rating:2.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220145

Vertical, Through Hole

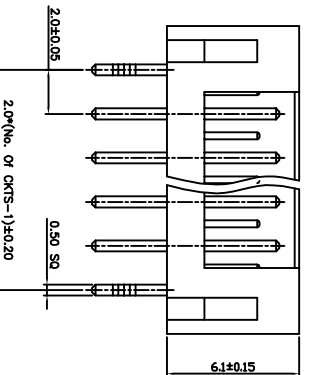

Specifications
Rating
Current Rating:2.0 Amp
Voltage Rating:100V AC/DC
Operating Temperature Range:-25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute




Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0220145-022221	11	0220145-112221
03	0220145-032221	12	0220145-122221
04	0220145-042221	13	0220145-132221
05	0220145-052221	14	0220145-142221
06	0220145-062221	15	0220145-152221
07	0220145-072221	16	0220145-162221
08	0220145-082221		
09	0220145-092221		
10	0220145-102221		

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220146

Right Angle, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0220146-022221	11	0220146-112221
03	0220146-032221	12	0220146-122221
04	0220146-042221	13	0220146-132221
05	0220146-052221	14	0220146-142221
06	0220146-062221	15	0220146-152221
07	0220146-072221	16	0220146-162221
08	0220146-082221		
09	0220146-092221		
10	0220146-102221		

Specifications
Rating
 Current Rating:2.0 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:--25~+85°C





Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-0 Color:Natural
 Contact:Copper Alloy
 Plated:Tin Plated

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220151

Vertical, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
04	0220151-042221	22	0220151-222221
06	0220151-062221	24	0220151-242221
08	0220151-082221	28	0220151-282221
10	0220151-102221	32	0220151-322221
12	0220151-122221	34	0220151-342221
14	0220151-142221	36	0220151-362221
16	0220151-162221	40	0220151-402221
18	0220151-182221		
20	0220151-202221		

Specifications
Rating
 Current Rating:2.0 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:--25~+85°C




Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-0 Color:Natural
 Contact:Copper Alloy
 Plated:Tin Plated

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220152

Right Angle, Through Hole






No. of CKTS	Part No.	No. of CKTS	Part No.
04	0220152-04±221	22	0220152-22±221
06	0220152-06±221	24	0220152-24±221
08	0220152-08±221	28	0220152-28±221
10	0220152-10±221	32	0220152-32±221
12	0220152-12±221	34	0220152-34±221
14	0220152-14±221	36	0220152-36±221
16	0220152-16±221	40	0220152-40±221
18	0220152-18±221		
20	0220152-20±221		

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220163

Vertical, SMT

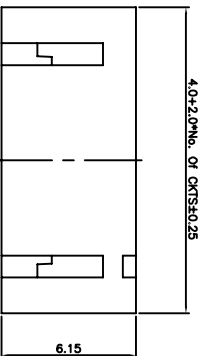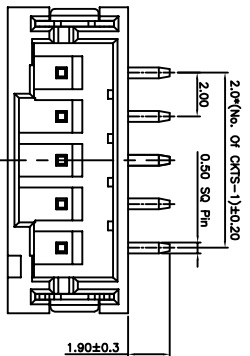

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0220163-02±221	11	0220163-11±221
03	0220163-03±221	12	0220163-12±221
04	0220163-04±221	13	0220163-13±221
05	0220163-05±221	14	0220163-14±221
06	0220163-06±221	15	0220163-15±221
07	0220163-07±221	16	0220163-16±221
08	0220163-08±221		
09	0220163-09±221		
10	0220163-10±221		

Specifications
Rating
 Current Rating:2.0 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:--25~+85°C




Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute

Material And Finish
 Insulator:LCP UL94V-0 Color:Natural
 Contact:Copper Alloy
 Plated:Tin Plated

**2.00mm(0.079") Pitch
Wire To Board Connector**

0220164

Right Angle, SMT





No. of CKTS	Part No.	No. of CKTS	Part No.
02	0220164-022521	11	0220164-112521
03	0220164-032521	12	0220164-122521
04	0220164-042521	13	0220164-132521
05	0220164-052521	14	0220164-142521
06	0220164-062521	15	0220164-152521
07	0220164-072521	16	0220164-162521
08	0220164-082521		
09	0220164-092521		
10	0220164-102521		


**2.50mm(0.098") Pitch
Wire To Board Connector**

0225175

Vertical, Through Hole



Circuit 1



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225175-022220	12	0225175-122220
03	0225175-032220	13	0225175-132220
04	0225175-042220	14	0225175-142220
05	0225175-052220	15	0225175-152220
06	0225175-062220	16	0225175-162220
07	0225175-072220	17	0225175-172220
08	0225175-082220	18	0225175-182220
09	0225175-092220	19	0225175-192220
10	0225175-102220	20	0225175-202220
11	0225175-112220		

Specifications
Rating
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C



Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-0 Color:Natural
 Contact:Copper Alloy
 Plated:Tin Plated

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225176

Right Angle, Through Hole

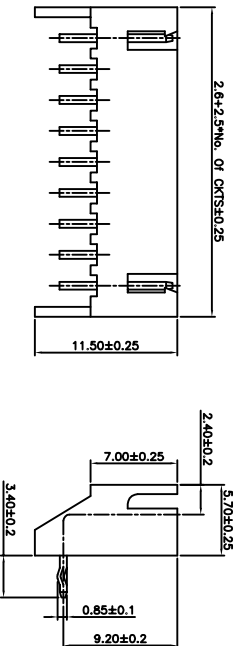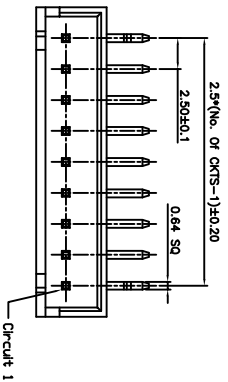

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225176-022220	12	0225176-122220
03	0225176-032220	13	0225176-132220
04	0225176-042220	14	0225176-142220
05	0225176-052220	15	0225176-152220
06	0225176-062220	16	0225176-162220
07	0225176-072220	17	0225176-172220
08	0225176-082220	18	0225176-182220
09	0225176-092220	19	0225176-192220
10	0225176-102220	20	0225176-202220
11	0225176-112220		

Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated




Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225185

Vertical, Through Hole

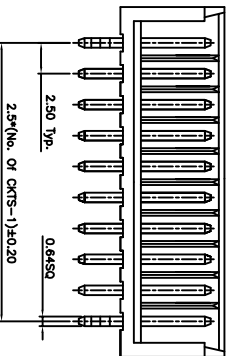

Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute




Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225185-022220	09	0225185-092220
03	0225185-032220	10	0225185-102220
04	0225185-042220	11	0225185-112220
05	0225185-052220	12	0225185-122220
06	0225185-062220	13	0225185-132220
07	0225185-072220	14	0225185-142220
08	0225185-082220	15	0225185-152220

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225186

Right Angle, Through Hole

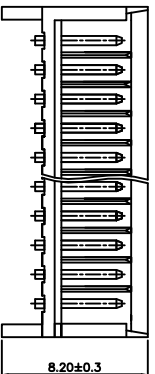

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225186-022220	09	0225186-092220
03	0225186-032220	10	0225186-102220
04	0225186-042220	11	0225186-112220
05	0225186-052220	12	0225186-122220
06	0225186-062220	13	0225186-132220
07	0225186-072220	14	0225186-142220
08	0225186-082220	15	0225186-152220

Specifications

Rating

Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute




Material And Finish

Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225191

Vertical, Through Hole

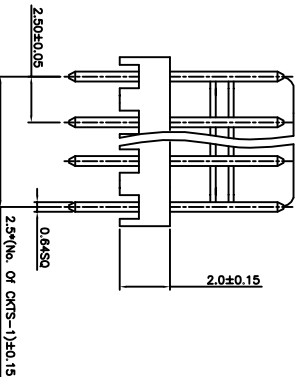

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225191-022220	12	0225191-122220
03	0225191-032220	13	0225191-132220
04	0225191-042220	14	0225191-142220
05	0225191-052220	15	0225191-152220
06	0225191-062220	16	0225191-162220
07	0225191-072220	17	0225191-172220
08	0225191-082220	18	0225191-182220
09	0225191-092220	19	0225191-192220
10	0225191-102220	20	0225191-202220
11	0225191-112220		

Specifications

Rating

Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute



Material And Finish

Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225192

Right Angle, Through Hole

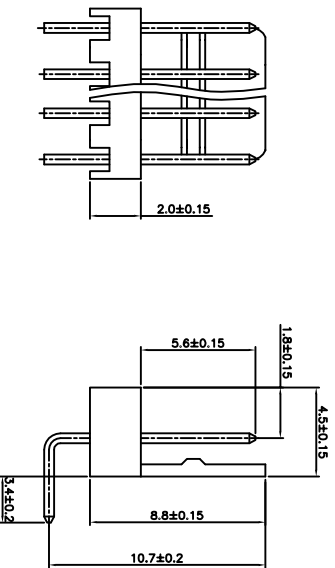

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225192-022220	12	0225192-122220
03	0225192-032220	13	0225192-132220
04	0225192-042220	14	0225192-142220
05	0225192-052220	15	0225192-152220
06	0225192-062220	16	0225192-162220
07	0225192-072220	17	0225192-172220
08	0225192-082220	18	0225192-182220
09	0225192-092220	19	0225192-192220
10	0225192-102220	20	0225192-202220
11	0225192-112220		

Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated





Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225201

Vertical, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225201-022220	10	0225201-102220
03	0225201-032220	11	0225201-112220
04	0225201-042220	12	0225201-122220
05	0225201-052220	13	0225201-132220
06	0225201-062220	14	0225201-142220
07	0225201-072220	15	0225201-152220
08	0225201-082220	16	0225201-162220
09	0225201-092220		

Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated





Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225202

Right Angle, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225202-022220	10	0225202-102220
03	0225202-032220	11	0225202-112220
04	0225202-042220	12	0225202-122220
05	0225202-052220	13	0225202-132220
06	0225202-062220	14	0225202-142220
07	0225202-072220	15	0225202-152220
08	0225202-082220	16	0225202-162220
09	0225202-092220		

Material And Finish
Insulator:Nylon 66 UL94V-0 Color:Natural
Contact:Copper Alloy
Plated:Tin Plated




Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.50mm(0.098") Pitch
Wire To Board Connector**

0225214

Right Angle, SMT



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225214-022921	10	0225214-102921
03	0225214-032921	11	0225214-112921
04	0225214-042921	12	0225214-122921
05	0225214-052921	13	0225214-132921
06	0225214-062921	14	0225214-142921
07	0225214-072921	15	0225214-152921
08	0225214-082921	16	0225214-162921
09	0225214-092921		

Material And Finish
Insulator:Nylon 9T UL94V-0 Color:Natural
Contact:Brass
Plated:Tin Plated





Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225221

Vertical, Through Hole



Specifications
Rating
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute




Material And Finish
 Insulator:PBT UL94V-0 Color:Black
 Contact:Brass
 Plated:Tin Plated

No.of CKTS	Part No.
02	0225221-022000
03	0225221-032000
04	0225221-042000
05	0225221-052000

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225222

Right Angle, Through Hole

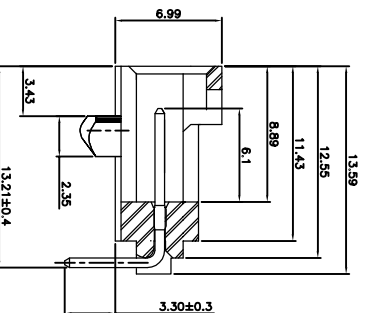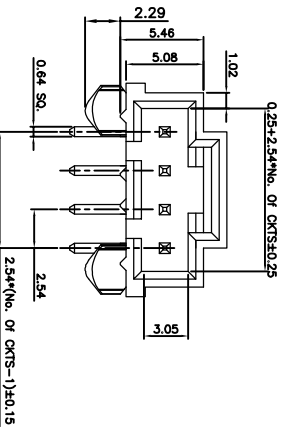

Specifications
Rating
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute




Material And Finish
 Insulator:PBT UL94V-0 Color:Black
 Contact:Brass
 Plated:Tin Plated

No.of CKTS	Part No.	No.of CKTS	Part No.
02	0225222-022000	14	0225222-142000
03	0225222-032000	15	0225222-152000
04	0225222-042000	16	0225222-162000
05	0225222-052000	17	0225222-172000
06	0225222-062000	18	0225222-182000
07	0225222-072000	19	0225222-192000
08	0225222-082000	20	0225222-202000
09	0225222-092000	21	0225222-2000Z1
10	0225222-102000	22	0225222-222000
11	0225222-112000	23	0225222-232000
12	0225222-122000	24	0225222-242000
13	0225222-132000	25	0225222-252000

**2.54mm(0.10") Pitch
Wire To Board Connector**

02252224

Right Angle, SMT

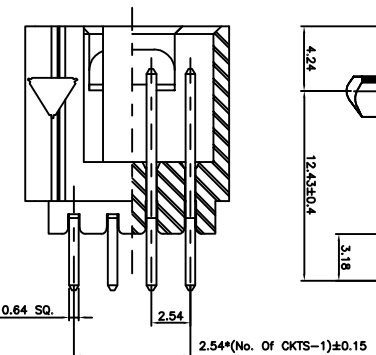

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225924-022107	14	0225924-142107
03	0225924-032107	15	0225924-152107
04	0225924-042107	16	0225924-162107
05	0225924-052107	17	0225924-172107
06	0225924-062107	18	0225924-182107
07	0225924-072107	19	0225924-192107
08	0225924-082107	20	0225924-202107
09	0225924-092107	21	0225924-210721
10	0225924-102107	22	0225924-222107
11	0225924-112107	23	0225924-232107
12	0225924-122107	24	0225924-242107
13	0225924-132107	25	0225924-252107

Material And Finish
Insulator:Nylon 6T UL94V-0 Color:Black
Contact:Brass
Plated:Tin Plated




Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225231

Vertical, Through Hole



Specifications
Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute



Material And Finish
Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225231-022220	12	0225231-122220
03	0225231-032220	13	0225231-132220
04	0225231-042220	14	0225231-142220
05	0225231-052220	15	0225231-152220
06	0225231-062220	16	0225231-162220
07	0225231-072220	17	0225231-172220
08	0225231-082220	18	0225231-182220
09	0225231-092220	19	0225231-192220
10	0225231-102220	20	0225231-202220
11	0225231-112220		

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225232

Right Angle, SMT

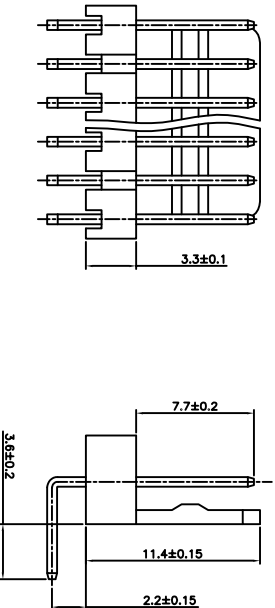

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225232-022220	12	0225232-122220
03	0225232-032220	13	0225232-132220
04	0225232-042220	14	0225232-142220
05	0225232-052220	15	0225232-152220
06	0225232-062220	16	0225232-162220
07	0225232-072220	17	0225232-172220
08	0225232-082220	18	0225232-182220
09	0225232-092220	19	0225232-192220
10	0225232-102220	20	0225232-202220
11	0225232-112220		

Specifications

Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute



Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225236

Right Angle, SMT

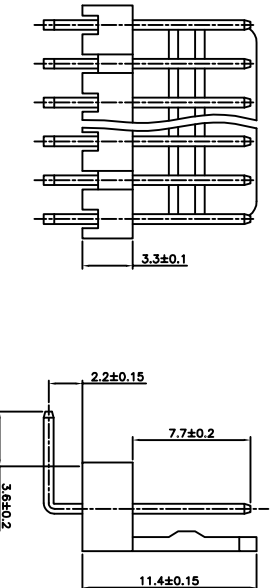

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225236-022220	12	0225236-122220
03	0225236-032220	13	0225236-132220
04	0225236-042220	14	0225236-142220
05	0225236-052220	15	0225236-152220
06	0225236-062220	16	0225236-162220
07	0225236-072220	17	0225236-172220
08	0225236-082220	18	0225236-182220
09	0225236-092220	19	0225236-192220
10	0225236-102220	20	0225236-202220
11	0225236-112220		

Specifications

Rating
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute


Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225241

Vertical, Through Hole





Specifications
Rating
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute

Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated






No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225241-022220	12	0225241-122220
03	0225241-032220	13	0225241-132220
04	0225241-042220	14	0225241-142220
05	0225241-052220	15	0225241-152220
06	0225241-062220	16	0225241-162220
07	0225241-072220	17	0225241-172220
08	0225241-082220	18	0225241-182220
09	0225241-092220	19	0225241-192220
10	0225241-102220	20	0225241-202220
11	0225241-112220		

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225251

Vertical, Through Hole



Specifications
Rating
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:800V AC/Minute




Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225251-022220	12	0225251-122220
03	0225251-032220	13	0225251-132220
04	0225251-042220	14	0225251-142220
05	0225251-052220	15	0225251-152220
06	0225251-062220	16	0225251-162220
07	0225251-072220	17	0225251-172220
08	0225251-082220	18	0225251-182220
09	0225251-092220	19	0225251-192220
10	0225251-102220	20	0225251-202220
11	0225251-112220		

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225260

IDC Type


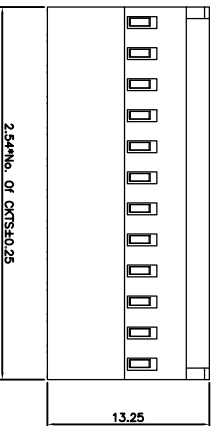



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225260-022260	10	0225260-102260
03	0225260-032260	11	0225260-112260
04	0225260-042260	12	0225260-122260
05	0225260-052260	13	0225260-132260
06	0225260-062260	14	0225260-142260
07	0225260-072260	15	0225260-152260
08	0225260-082260	16	0225260-162260
09	0225260-092260	17	0225260-172260

**2.54mm(0.10") Pitch
Wire To Board Connector**

0225270

IDC Type



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0225270-022200	10	0225270-102200
03	0225270-032200	11	0225270-112200
04	0225270-042200	12	0225270-122200
05	0225270-052200	13	0225270-132200
06	0225270-062200	14	0225270-142200
07	0225270-072200	15	0225270-152200
08	0225270-082200	16	0225270-162200
09	0225270-092200	17	0225270-172200

Specifications

Rating

Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:800V AC/Minute





Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Black
Contact:Brass
Plated:Tin Plated

**3.00mm(0.118") Pitch
Wire To Board Connector**

0230282

Right Angle, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0230282-022100	07	0230282-072100
03	0230282-032100	08	0230282-082100
04	0230282-042100	09	0230282-092100
05	0230282-052100	10	0230282-102100
06	0230282-062100	11	0230282-112100

Specifications

Rating

Current Rating:5.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute




Material And Finish

Insulator:Nylon 6T UL94V-0 Color:Black
Contact:Brass
Plated:Tin Plated

**3.00mm(0.118") Pitch
Wire To Board Connector**

0230283

Vertical, SMT



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0230283-022300	07	0230283-072300
03	0230283-032300	08	0230283-082300
04	0230283-042300	09	0230283-092300
05	0230283-052300	10	0230283-102300
06	0230283-062300	11	0230283-112300

Specifications

Rating

Current Rating:5.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute




Material And Finish

Insulator:LCP UL94V-2 Color:Black
Contact:Brass
Plated:Tin Plated

**3.00mm(0.118") Pitch
Wire To Board Connector**

0230284

Right Angle, SMT



Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute




Material And Finish
 Insulator:LCP UL94V-0 Color:Black
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0230284-022300	08	0230284-082300
03	0230284-032300	09	0230284-092300
04	0230284-042300	10	0230284-102300
05	0230284-052300	11	0230284-112300
06	0230284-062300	12	0230284-112300
07	0230284-072300		

**3.00mm(0.118") Pitch
Wire To Board Connector**

0230285

Vertical, Through Hole



Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute





Material And Finish
 Insulator:Nylon 6T UL94V-2 Color:Black
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0230285-022100	07	0230285-072100
03	0230285-032100	08	0230285-082100
04	0230285-042100	09	0230285-092100
05	0230285-052100	10	0230285-102100
06	0230285-062100	11	0230285-112100

**3.00mm(0.118") Pitch
Wire To Board Connector**

0230291

Vertical, Through Hole

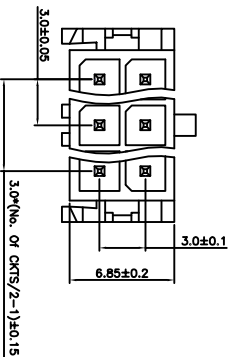

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute





Material And Finish
 Insulator:Nylon 6T UL94V-2 Color:Black
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0230291-022100	16	0230291-162100
04	0230291-042100	18	0230291-182100
06	0230291-062100	20	0230291-202100
08	0230291-082100	22	0230291-222100
10	0230291-102100	24	0230291-242100
12	0230291-122100		
14	0230291-142100		

**3.00mm(0.118") Pitch
Wire To Board Connector**

0230292

Vertical, Through Hole



Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute






Material And Finish
 Insulator:Nylon 6T UL94V-2 Color:Black
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0230292-022100	16	0230292-162100
04	0230292-042100	18	0230292-182100
06	0230292-062100	20	0230292-202100
08	0230292-082100	22	0230292-222100
10	0230292-102100	24	0230292-242100
12	0230292-122100		
14	0230292-142100		

**3.00mm(0.118") Pitch
Wire To Board Connector**

0230293

Vertical, SMT

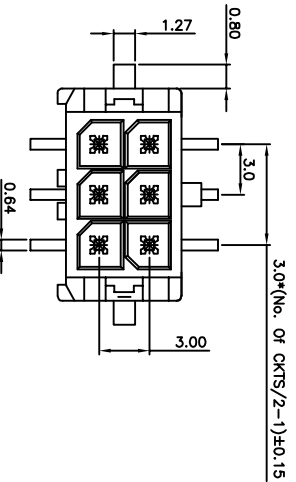

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish




Insulator:LCP UL94V-0 Color:Black
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0230293-022300	16	0230293-162300
04	0230293-042300	18	0230293-182300
06	0230293-062300	20	0230293-202300
08	0230293-082300	22	0230293-222300
10	0230293-102300	24	0230293-242300
12	0230293-122300		
14	0230293-142300		

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239301

Vertical, Through Hole

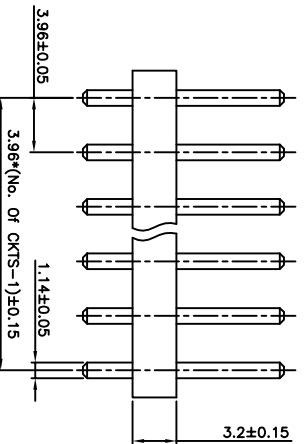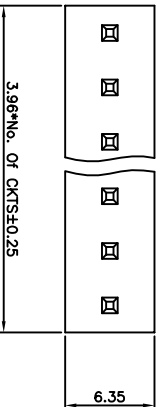

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish




Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239301-022220	12	0239301-122220
03	0239301-032220	13	0239301-132220
04	0239301-042220	14	0239301-142220
05	0239301-052220	15	0239301-152220
06	0239301-062220	16	0239301-162220
07	0239301-072220	17	0239301-172220
08	0239301-082220	18	0239301-182220
09	0239301-092220	19	0239301-192220
10	0239301-102220	20	0239301-202220
11	0239301-112220		

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239302

Right Angle, Through Hole


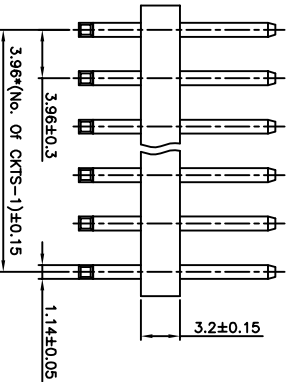



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239302-022220	12	0239302-122220
03	0239302-032220	13	0239302-132220
04	0239302-042220	14	0239302-142220
05	0239302-052220	15	0239302-152220
06	0239302-062220	16	0239302-162220
07	0239302-072220	17	0239302-172220
08	0239302-082220	18	0239302-182220
09	0239302-092220	19	0239302-192220
10	0239302-102220	20	0239302-202220
11	0239302-112220		

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239306

Vertical, Through Hole



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239306-022220	12	0239306-122220
03	0239306-032220	13	0239306-132220
04	0239306-042220	14	0239306-142220
05	0239306-052220	15	0239306-152220
06	0239306-062220	16	0239306-162220
07	0239306-072220	17	0239306-172220
08	0239306-082220	18	0239306-182220
09	0239306-092220	19	0239306-192220
10	0239306-102220	20	0239306-202220
11	0239306-112220		

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C




Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239311

Vertical, Through Hole

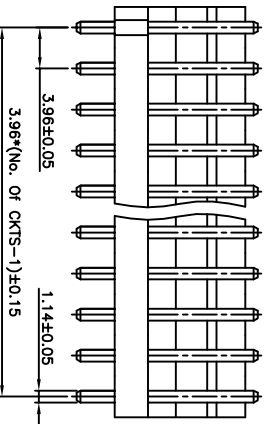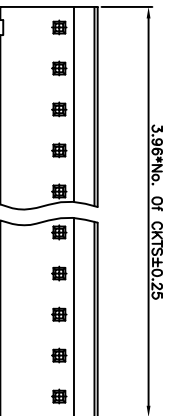

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239311-022220	12	0239311-122220
03	0239311-032220	13	0239311-132220
04	0239311-042220	14	0239311-142220
05	0239311-052220	15	0239311-152220
06	0239311-062220	16	0239311-162220
07	0239311-072220	17	0239311-172220
08	0239311-082220	18	0239311-182220
09	0239311-092220	19	0239311-192220
10	0239311-102220	20	0239311-202220
11	0239311-112220		

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C




Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239312

Right Angle, Through Hole

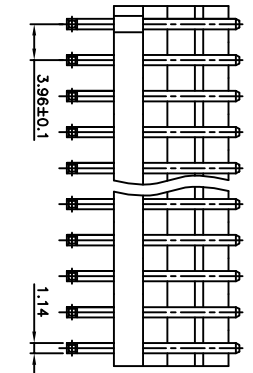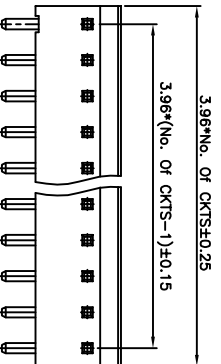

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239312-022220	12	0239312-122220
03	0239312-032220	13	0239312-132220
04	0239312-042220	14	0239312-142220
05	0239312-052220	15	0239312-152220
06	0239312-062220	16	0239312-162220
07	0239312-072220	17	0239312-172220
08	0239312-082220	18	0239312-182220
09	0239312-092220	19	0239312-192220
10	0239312-102220	20	0239312-202220
11	0239312-112220		

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C




Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239321

Vertical, Through Hole

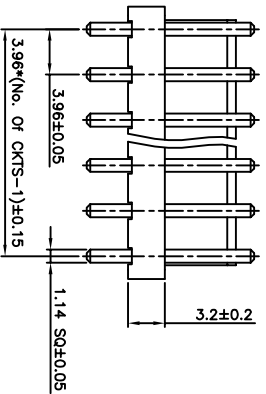

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239321-022200	12	0239321-122220
03	0239321-032220	13	0239321-132220
04	0239321-042220	14	0239321-142220
05	0239321-052220	15	0239321-152220
06	0239321-062220	16	0239321-162220
07	0239321-072220	17	0239321-172220
08	0239321-082220	18	0239321-182220
09	0239321-092220	19	0239321-192220
10	0239321-102220	20	0239321-202220
11	0239321-112220		

Material And Finish
Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated




Specifications
Rating
Current Rating:5.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239331

Vertical, Through Hole

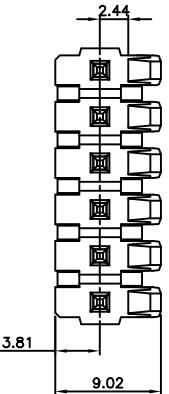

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239331-022200	14	0239331-142200
03	0239331-032200	15	0239331-152200
04	0239331-042200	16	0239331-162200
05	0239331-052200	17	0239331-172200
06	0239331-062200	18	0239331-182200
07	0239331-072200	19	0239331-192200
08	0239331-082200	20	0239331-202200
09	0239331-092200	21	0239331-212200
10	0239331-102200	22	0239331-222200
11	0239331-112200	23	0239331-232200
12	0239331-122200	24	0239331-242200
13	0239331-132200		

Material And Finish
Insulator:Nylon 66 UL94V-2 Color:Black
Contact:Brass
Plated:Tin Plated


Specifications
Rating
Current Rating:5.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical
Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239421

Vertical, Through Hole

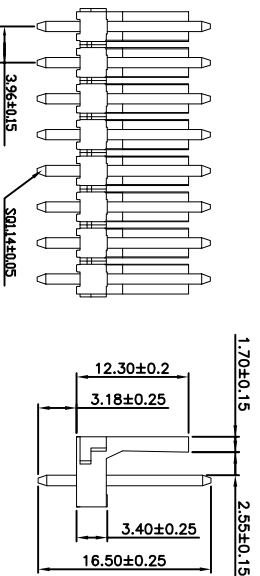

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239421-022200	12	0239421-122200
03	0239421-032200	13	0239421-132200
04	0239421-042200	14	0239421-142200
05	0239421-052200	15	0239421-152200
06	0239421-062200	16	0239421-162200
07	0239421-072200	17	0239421-172200
08	0239421-082200	18	0239421-182200
09	0239421-092200		
10	0239421-102200		
11	0239421-112200		

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute




Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

**3.96mm(0.156") Pitch
Wire To Board Connector**

0239332

Right Angle, Through Hole

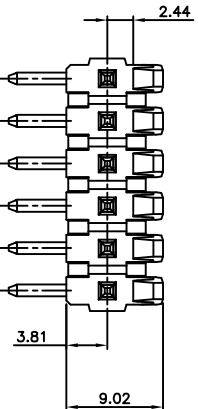

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0239332-022200	14	0239332-142200
03	0239332-032200	15	0239332-152200
04	0239332-042200	16	0239332-162200
05	0239332-052200	17	0239332-172200
06	0239332-062200	18	0239332-182200
07	0239332-072200	19	0239332-192200
08	0239332-082200	20	0239332-202200
09	0239332-092200	21	0239332-212200
10	0239332-102200	22	0239332-222200
11	0239332-112200	23	0239332-232200
12	0239332-122200	24	0239332-242200
13	0239332-132200		

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute


Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Black
 Contact:Brass
 Plated:Tin Plated

**4.20mm(0.165") Pitch
Wire To Board Connector**

0242341

Vertical, Through Hole

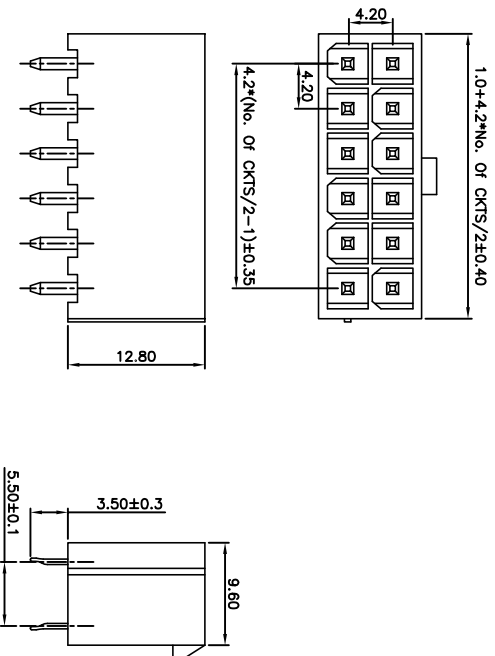

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish


Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0242341-022220	16	0242341-162220
04	0242341-042220	18	0242341-182220
06	0242341-062220	20	0242341-202220
08	0242341-082220	22	0242341-222220
10	0242341-102220	24	0242341-242220
12	0242341-122220		
14	0242341-142220		

**4.20mm(0.165") Pitch
Wire To Board Connector**

0242347

Vertical, Through Hole

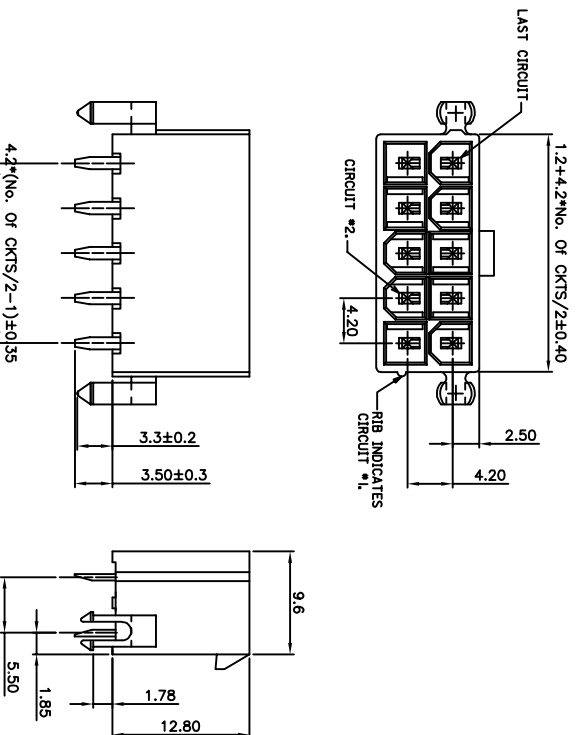

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish



Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0242347-022220	16	0242347-162220
04	0242347-042220	18	0242347-182220
06	0242347-062220	20	0242347-202220
08	0242347-082220	22	0242347-222220
10	0242347-102220	24	0242347-242220
12	0242347-122220		
14	0242347-142220		

**4.20mm(0.165") Pitch
Wire To Board Connector**

0242357

Vertical, Through Hole

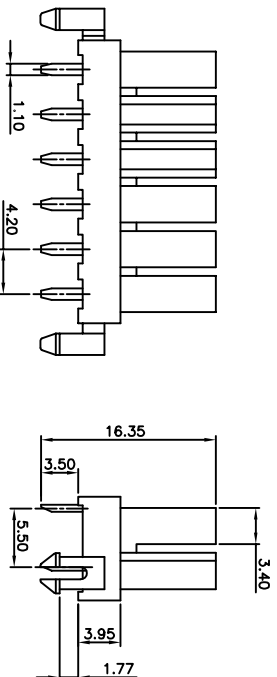
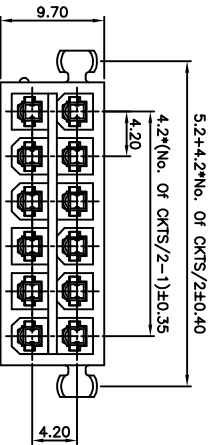


No.of CKTS	Part No.	No.of CKTS	Part No.
04	0242357-042220	22	0242357-222220
06	0242357-062220	24	0242357-242220
08	0242357-082220	26	0242357-262220
10	0242357-102220	32	0242357-322220
12	0242357-122220	34	0242357-342220
14	0242357-142220	36	0242357-362220
16	0242357-162220		
18	0242357-182220		
20	0242357-202220		

**4.20mm(0.165") Pitch
Wire To Board Connector**

0242367

Vertical, Through Hole

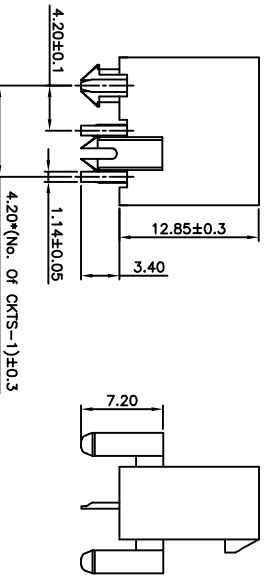

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute




Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

No.of CKTS	Part No.
02	0242367-022220
03	0242367-032220
04	0242367-042220
05	0242367-052220
06	0242367-062220

**4.20mm(0.165") Pitch
Wire To Board Connector**

0242371

Vertical, Through Hole

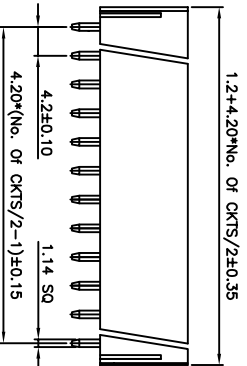

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0242371-022220	18	0242371-182220
04	0242371-042220	20	0242371-202220
06	0242371-062220	22	0242371-222220
08	0242371-082220	24	0242371-242220
10	0242371-102220		
12	0242371-122220		
14	0242371-142220		
16	0242371-162220		

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute




Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

**4.20mm(0.165") Pitch
Wire To Board Connector**

0242372

Right Angle, Through Hole

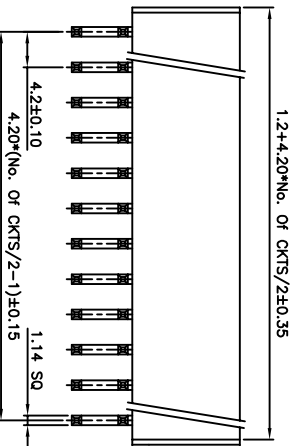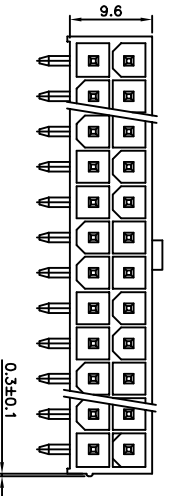

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0242372-022220	18	0242372-182220
04	0242372-042220	20	0242372-202220
06	0242372-062220	22	0242372-222220
08	0242372-082220	24	0242372-242220
10	0242372-102220		
12	0242372-122220		
14	0242372-142220		
16	0242372-162220		

Specifications
Rating
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute



Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated

**4.20mm(0.165") Pitch
Wire To Board Connector**

0242378

Right Angle, Through Hole

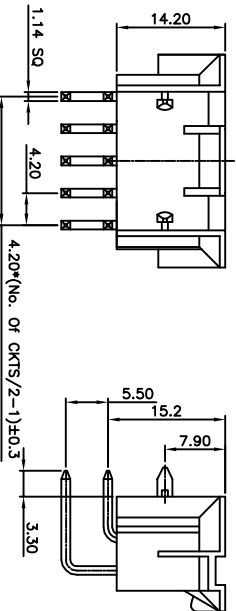

No. of CKTS	Part No.
04	0242378-042220
06	0242378-062220
10	0242378-102220
14	0242378-142220
16	0242378-162220
18	0242378-182220
24	0242378-242220

Specifications

Rating

Current Rating:5.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute




Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

**5.08mm(0.20") Pitch
Wire To Board Connector**

0251382

Vertical, Through Hole

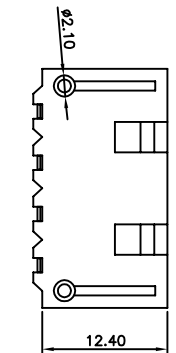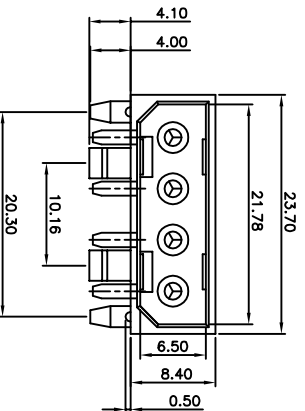

Specifications

Rating

Current Rating:7.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

Material And Finish





Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

No. of CKTS	Part No.
04	0251382-042220

**5.08mm(0.20") Pitch
Wire To Board Connector**

0251 401

Vertical, Through Hole

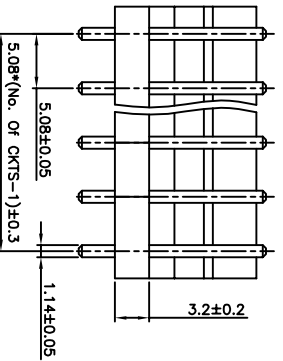

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0251401-022220	12	0251401-122220
03	0251401-032220	13	0251401-132220
04	0251401-042220	14	0251401-142220
05	0251401-052220	15	0251401-152220
06	0251401-062220	16	0251401-162220
07	0251401-072220	17	0251401-172220
08	0251401-082220	18	0251401-182220
09	0251401-092220	19	0251401-192220
10	0251401-102220	20	0251401-202220
11	0251401-112220		

Specifications

Rating

Current Rating:7.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute




Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

**5.08mm(0.20") Pitch
Wire To Board Connector**

0251 391

Vertical, Through Hole

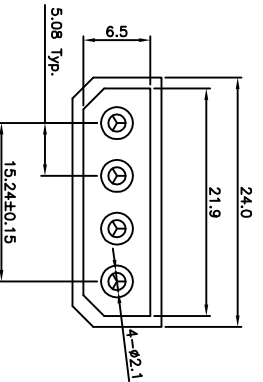

Specifications

Rating

Current Rating:7.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

Material And Finish





Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

No. of CKTS	Part No.
04	0251391-042200

**5.08mm(0.20") Pitch
Wire To Board Connector**

0251402

Right Angle, Through Hole


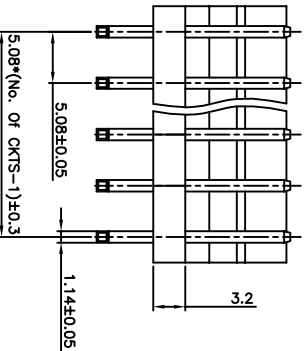



No. of CKTS	Part No.	No. of CKTS	Part No.
02	0251402-022220	12	0251402-122220
03	0251402-032220	13	0251402-132220
04	0251402-042220	14	0251402-142220
05	0251402-052220	15	0251402-152220
06	0251402-062220	16	0251402-162220
07	0251402-072220	17	0251402-172220
08	0251402-082220	18	0251402-182220
09	0251402-092220	19	0251402-192220
10	0251402-102220	20	0251402-202220
11	0251402-112220		

**5.08mm(0.20") Pitch
Wire To Board Connector**

0251411

Vertical, Through Hole

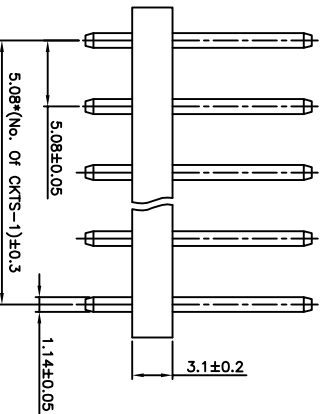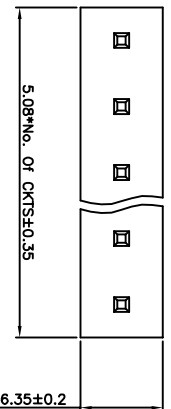

No. of CKTS	Part No.	No. of CKTS	Part No.
02	0251411-022220	09	0251411-092220
03	0251411-032220	10	0251411-102220
04	0251411-042220	11	0251411-112220
05	0251411-052220	12	0251411-122220
06	0251411-062220		
07	0251411-072220		
08	0251411-082220		

Specifications

Rating
Current Rating:7.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25°~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute

Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

Specifications

Rating
Current Rating:7.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:--25°~+85°C

Electrical

Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1500V AC/Minute




Material And Finish

Insulator:Nylon 66 UL94V-2 Color:Natural
Contact:Brass
Plated:Tin Plated

**5.08mm(0.20") Pitch
Wire To Board Connector**

0251412

Right Angle, Through Hole


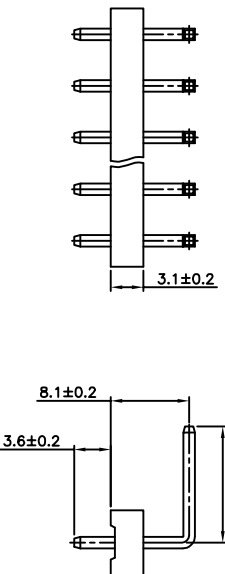

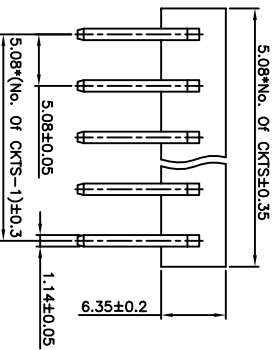


No. of CKTS	Part No.	No. of CKTS	Part No.
02	0251412-022220	12	0251412-122220
03	0251412-032220	13	0251412-132220
04	0251412-042220	14	0251412-142220
05	0251412-052220	15	0251412-152220
06	0251412-062220	16	0251412-162220
07	0251412-072220	17	0251412-172220
08	0251412-082220	18	0251412-182220
09	0251412-092220	19	0251412-192220
10	0251412-102220	20	0251412-202220
11	0251412-112220		

**5.0(0.197") + 7.5mm(0.295") Pitch
Wire To Board Connector**

0275421

Vertical, Through Hole

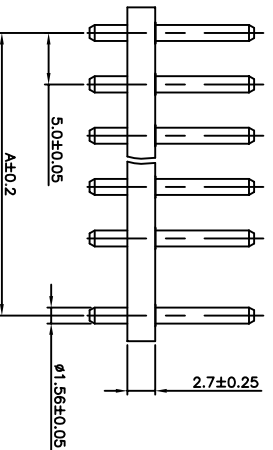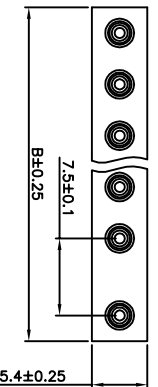

No. of CKTS	Part No.	A	B
01	0275421-022220	0.00	5.00
02	0275421-022220	7.50	12.50
03	0275421-022220	12.50	17.50
04	0275421-022220	17.50	22.50
05	0275421-022220	22.50	27.50
06	0275421-022220	27.50	32.50

Specifications
Rating
 Current Rating:7.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:--25~+85°C

Electrical
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1500V AC/Minute

Material And Finish
 Insulator:Nylon 66 UL94V-2 Color:Natural
 Contact:Brass
 Plated:Tin Plated